


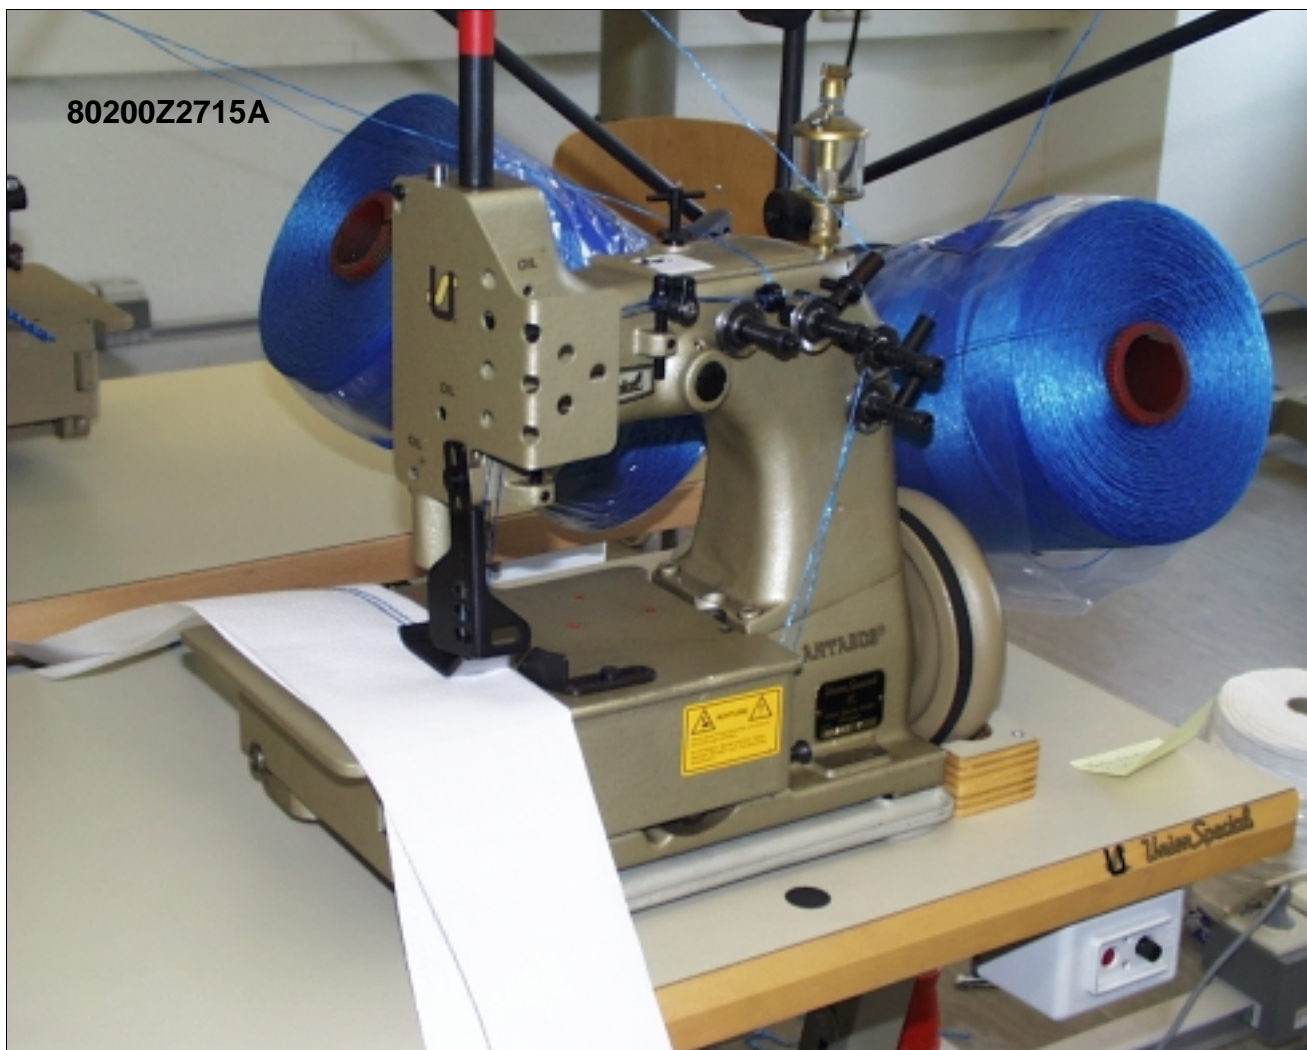

Union Special

80200 Antaeus®

**HEAVY DUTY SEAMING AND HEMMING MACHINES
FOR PRODUCING BAGS AND CONTAINER BAGS (FIBCs)
MADE OF JUTE, BURLAP AND WOVEN POLYPROPYLENE**










**80200AA 80200AB 80200AC 80200AD
80200Z2715 80200Z2715A 80200Z3214
with
Sewing Table UN280G130**

● **STURDY**

● **EFFICIENT**

● **RELIABLE**

| Machine Style | Description | Application | Seam Specification | Stitch Range Standard Setting | Sewing Capacity |
|---|--|---|---|-------------------------------------|-----------------------------|
| 80200AA Needle: 2 Threads: 2 | Single needle double locked stitch machine, plain feed. Max. Speed: 2000 RPM (depending on sewing operation) | For seaming heavy weight jute or burlap bags. |  401 SSa-1 | 7-13 mm (2-4 S.P.I.) 10 mm | Up to 17 mm (43/64 inch) |
| 80200AB Needle: 1 Thread: 1 | Single needle single thread chain stitch machine, plain feed. Max. Speed: 2000 RPM (depending on sewing operation) | For seaming heavy weight jute or burlap bags. |  101 SSa-1 | 7-13 mm (2-4 S.P.I.) 10 mm | Up to 17 mm (43/64 inch) |
| 80200AC Needle: 2 Threads: 2 | Single needle double locked stitch machine, plain feed. Adjustable hemmer 10-15 mm hem width (25/64-19/32 inch). Max. Speed: 2000 RPM (depending on sewing operation) | For hemming openings of heavy weight jute, burlap or woven polypropylene bags. |  401 EFb-1 | 7-13 mm (2-4 S.P.I.) 10 mm | Up to 17 mm (43/64 inch) |
| 80200AD Needle: 1 Thread: 1 | Single needle single thread chain stitch machine, plain feed. Standard fixed hemmer for 10 mm hem width. Also available in 6, 7, 8, 9, 12, 14, 15 and 18 mm hem width. Max. Speed: 2000 RPM (depending on sewing operation) | For hemming openings of heavy weight jute, burlap or woven polypropylene bags. |  101 EFb-1 | 7-13 mm (2-4 S.P.I.) 10 mm | Up to 17 mm (43/64 inch) |
| 80200 Z2715 Needles: 2 staggered Threads: 4 | Two independent rows double locked stitch machine, plain feed with compensating presser foot (A8368 right, A8380 left). Produces two parallel seams: needle distance 7.2 mm (18 gauge). Adjustable hemmer No. A9785 for 10-25 mm seam width upon request and at extra charge. Max. Speed: 1800 RPM (depending on sewing operation) | For seaming heavy weight bags and container bags (FIBCs) made of jute or woven polypropylene. |  (401.401) SSa-2 | 7-13 mm (2-4 S.P.I.) 10 mm | Up to 17 mm (43/64 inch) |
| 80200 Z2715A Needles: 2 staggered Threads: 4 | Same as 80200Z2715 but with solid presser foot A8369B. | For sewing geo textiles. |  (401.401) SSa-2 | 7-13 mm (2-4 S.P.I.) 10 mm | Up to 17 mm (43/64 inch) |
| 80200 Z3214 Needle: 1 Threads: 2 | Single needle double locked stitch machine, plain feed. Adjustable hemmer for 10-25 mm hem width included. Max. Speed 1800 RPM (depending on sewing operation) | For seaming and hemming heavy weight bags and container bags (FIBCs) made of woven polypropylene. |  401 EFb-1 or 401 SSp-1 | 5-11 mm (2 1/2-5 S.P.I.) 7 mm | Up to 17 mm (43/64 inch) |

Subject to change without notice © Union Special GmbH